




# Pressure Switch

# Series *IS1000M*

## How to Order



Pressure switch

### Body size

2	For AC21
3	For AC26 , 31
4	For AC41-02 to 04
5	For AC41-06
6	For AC51 , 56 , 61

### Attachment

—	Without attachment
Y	With attachment
YL	With attachment and L type bracket
YT	With attachment and T type bracket

### Options

X201	Length of lead wire: 3m
X202	Setting pressure range: 0.1 to 0.6Mpa
X215	Lead wire length 3m, Operating pressure range 0.1 to 0.6MPa

### Attachments for IS1000

Pressure switch applicable model No.	Y type standard	YL type with L type bracket	YT type with T type bracket
<b>IS1000M-2</b>	Y20M	Y20LM	Y20TM
<b>IS1000M-3</b>	Y30M	Y30LM	Y30TM
<b>IS1000M-4</b>	Y40M	Y40LM	Y40TM
<b>IS1000M-5</b>	Y50M	Y50LM	Y50TM
<b>IS1000M-6</b>	Y60M	Y60LM	Y60TM




For safety precautions, precautions for products, product specifications, external dimensions, and model selection procedures, see the comprehensive catalog (Best Pneumatics) or the catalog for each individual product.




# Pressure Switch

# Series *IS1000M*

## How to Order

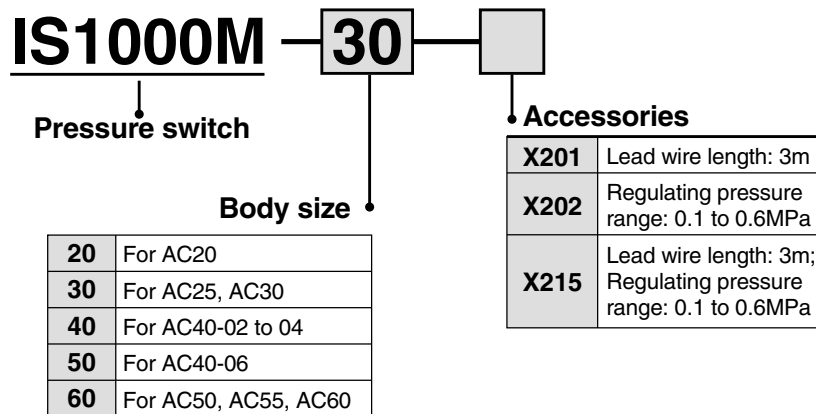

 For safety precautions, precautions for products, product specifications, external dimensions, and model selection procedures, see the comprehensive catalog (Best Pneumatics) or the catalog for each individual product.